

**NOTES:**

1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAYS. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT.


2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTERING THE PUBLIC RIGHT-OF-WAY.

3. PAVED ROADWAY OF ANNETTE LANE SHALL BE SWEEPED DAILY.

4. USE STRAW WATTLES OR OTHER APPROVED METHODS TO PREVENT SEDIMENT RUNOFF.

5. STONE ENTRANCE SHALL CONSIST OF 2"-3" COARSE AGGREGATE, A MINIMUM OF 6" THICK AND A MAXIMUM OF 12" THICK. AGGREGATE SHALL BE UNDERLAIN BY FILTER FABRIC.

6. STONE ENTRANCE SHALL BE REMOVED IMMEDIATELY FOLLOWING THE COMPLETION OF CONSTRUCTION ACTIVITIES.

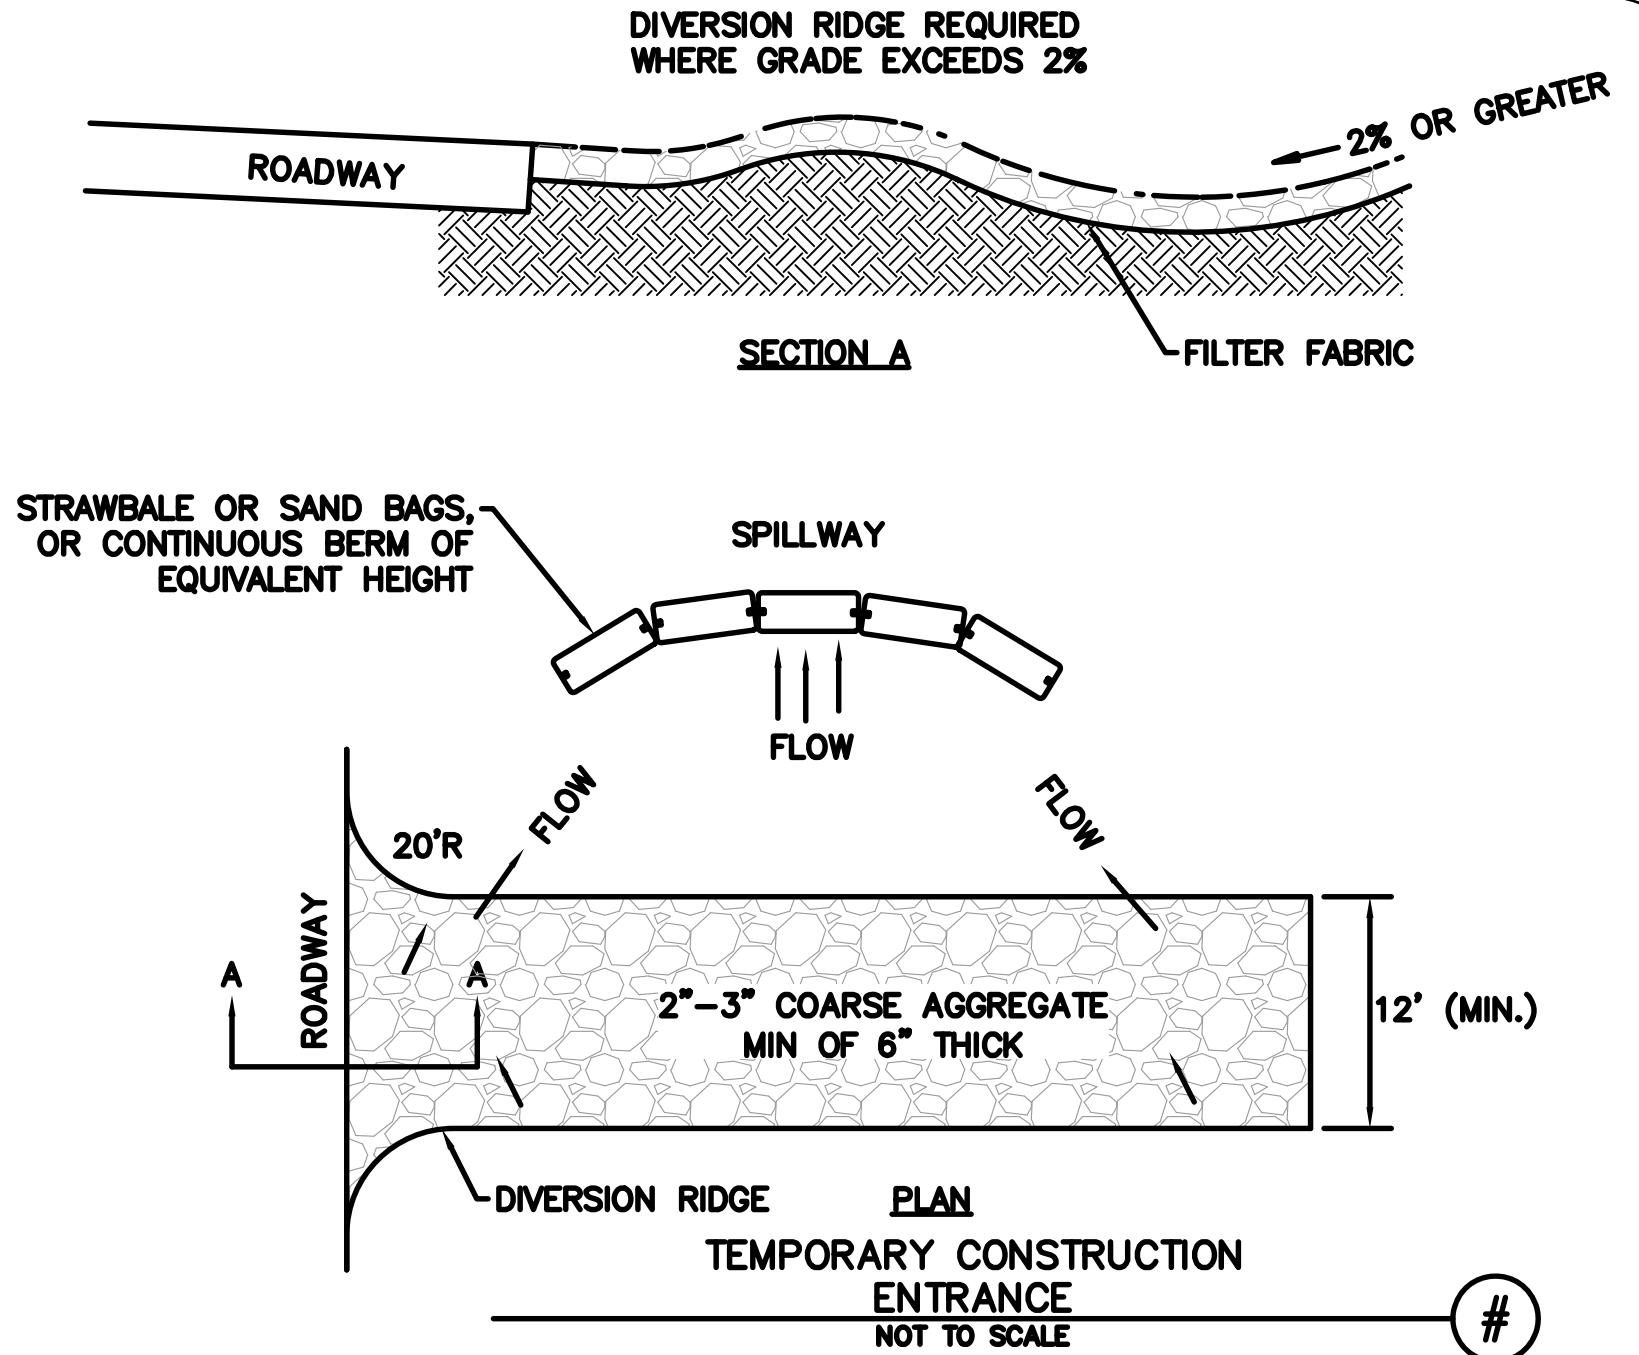

## TYPICAL CONSTRUCTION ENTRANCE

LOCATED IN

0 ANNETTE LANE  
READING, MA

PREPARED BY

*Vineyard Engineering &  
Environmental Services Inc.*

Land Survey & Environmental Services  
17 Salem Street, Medford, MA 02155  
Tel. 781.933.3330 Fax: 781.933.3334  
www.VineyardEng.com